

ESPERO MOVABLE WALLS PRODUCT BROCHURE

Slidio

Our newest sliding wall

Rabobank, Alphen aan den Rijn (NL)

Thanks to the Slidio wall, the area around this cash machine can be partitioned off in seconds to give customers more privacy.

ESPERO

Simplicity, quality and ease of use all rolled into one

Discover the new Slidio sliding wall and get optimum space reconfigurability.

Set up in one single movement

It takes just one single hand movement to set up or park the entire Slidio sliding wall. This saves you lots of time, because there is just one manoeuvre involved. The wall is also available as a 2-wing version so that the wall can cover an even greater width. The larger version is equally easy to operate.

For what kind of spaces?

The Slidio sliding wall gives you the comfort, ease of use and quality that Espero stands for. This is the ideal wall system when you need a movable wall that lets you open up spaces quickly, but do not have sufficient space for a large wall system. Sliding walls are often used at schools to turn a space into 2 separate classrooms. You can also find them at libraries, office buildings and banks.

Various versions

The Slidio is available in various versions. This movable wall can be supplied with glass or various other finishes, with or without sound insulation and with visible or concealed profiles. We have the right solution for any space. Take a look at all the versions.

Type 45

Glass version with visible profiles and a thickness of 45 mm.

Type 65

Glass or wooden version with visible profiles, a thickness of 65 mm, and a sound-insulation rating of up to 46 dB*.



DENISE School in Amsterdam
The Slidio sliding wall is available with one wing (see photo above) or two (see photo below).



Type 100

Glass or wooden version with visible profiles, a thickness of 107 mm, and a sound-insulation rating of up to 50 dB**. Operation: semi-automatic.

Type 110

Wooden version with concealed profiles, a thickness of 119 mm, and a sound-insulation rating of up to 50 dB**. Operation: semi-automatic.

Key features and benefits

- Quick and easy to operate
- Supplied with glass or various other finishes
- In one or two-wing version available
- Sound insulation rating up to 50 dB

* Sound isolation rating (R_w) = 38dB with a single seal, and up to 46 dB with a double seal

** R_w = 38dB with a single seal, and up to 50dB with a double seal

The dB rating depends on many factors. Please ask us for details and advice.



Biosintrum - Oosterwolde (NL)

Two Slidio walls separate the auditorium from the central hall.



Rabobank, Alphen aan den Rijn (NL)

Create two separate spaces in one sweeping movement.

Quick set-up



Biosintrum, Oosterwolde (NL)
Detail of the Slidio wall

Details



Type 65
Glass




Type 65
Wood



Type 45
Glass



Type 100
Glass




Type 100
Wood




Type 110
Wood

Top view: One wing

In front of the recess




Into the recess




Top view: Two wings

In front of the recess




Into the recess



With a product range as extensive as ours, we always have a solution to suit your needs

Click the links below for more details and engaging cases about
our mobile walls in projects across the globe.

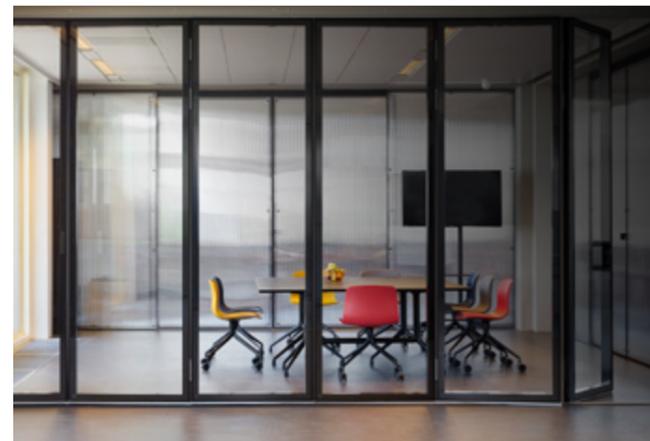

Want to find out more about all the possibilities?
We will gladly join your thought process.
Call +31 (0)416 33 89 55 or email us on info@espero.nl

+31 (0)416 338955
info@espero.eu
www.espero.eu

Sluisweg 26-28
5145 PE Waalwijk
The Netherlands

ESPERO